




SHURFLO® MEDIUM WATER BOOST SYSTEM

AL AL C R R E L A E , P E F F A I P R E P

Medium Water Boost: 804-023
Replacement Bladder: 94-697-00

APPLICATIONS

- Fountain
- Coffee
- Drinking Water

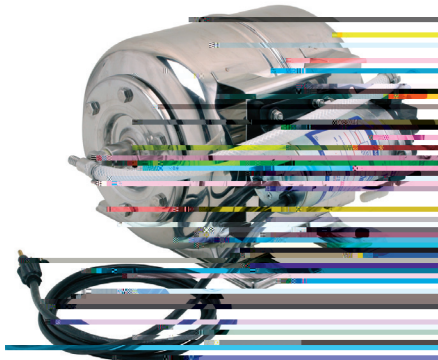

- Increases flow and pressure to carbonated and non-carbonated soda valves for consistent drink quality
- Maximizes filter life on filtration systems
- Replaceable bladder for maximum system life and simple maintenance
- Self-priming pump can run dry without damage
- Eliminates pulsation at dispenser valve

INSTALLATION TIPS

Must be installed BEFORE the water filtration

Charge tank precharge at time of installation is at 50 psi (3.4 bar)

Check precharge each service visit to ensure optimum performance

Do not charge accumulator tank with CO₂

Use NSF listed high pressure braided tubing for inlet/outlet port (not included)

SIZING

Max. Working Pressure: 117 psi (8 bar).

Ports: 3/8" (10 mm) barb inlet/outlet

SPECIFICATIONS

Booster Pump

SHURflo 90 psi 115 VAC 8000 series
corded pump (NSF, UL, CUL listed)

Accumulator Tank

2 gallon (7.62 L) SS and butyl rubber
bladder (NSF listed)

Ports

3/8" (10 mm) barb inlet/outlet

Pre-charge

W/air at installation

50 psi (3.4 bar) (recommended for most
beverage applications)



FILTRATION & PROCESSING SOLUTIONS