The


♦

♦

◆

•

•

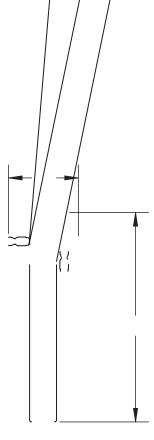

It is recommended that filter cartridges be replaced every six (6) months on a regular scheduled program, or when capacity is reached or if water pressure or fow to equipment becomes inadequate.

Always replace flter cartridges at least once per year.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

 $Systems\ certifed\ for\ cyst\ reduction\ may\ be\ used\ on\ disinfected\ water\ that\ may\ contain\ flterable\ cysts.$

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.



1040 Muirf eld Drive