



EVERPURE® KLEENSTEAM®

THE NEXT GENERATION OF QUALITY WATER TREATMENT SYSTEM FOR STEAM APPLICATION

Kleensteam II Twin System: EV9797-22
7CB5 Replacement Cartridge: EV9618-11
SS-10 Cartridge: EV9799-02

APPLICATIONS

Commercial Steam
Foodservice Steamer

INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating.

Use minimum 1/2" inlet water line (3/4" preferred).

Connect the system to the boiler water only. Do not connect system to the condenser.

Install vertically with cartridges hanging down.

Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

Flush cartridges by running water through system for five (5) minutes at full flow.

OPERATION TIPS

Change 7CB5 Cartridge on a regular six (6) month preventative maintenance program, when capacity is reached or when pressure falls below 10 psi (0.7 bar).

Change SS-10 Cartridge before Hydroblend™ compound is completely used up.


Service flow rate must not exceed 2.5 gpm (9.46 Lpm) for single cartridge systems or 5.0 gpm (18.92 Lpm) for dual cartridge systems.

Always flush the filter cartridge at time of installation and cartridge change.

Use for periodic deliming as needed by installing the dip tube assembly in place of the SS-10 and dissolving ScaleKleen in SR-X housing. Full deliming instructions are provided with the system.

EVERPURE® KLEENSTEAM® II TWIN SYSTEM

E 9797 22

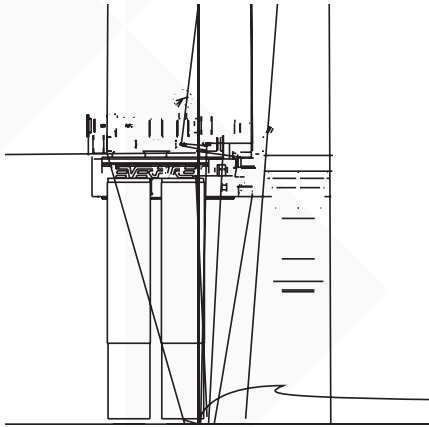

SPECIFICATIONS

Service Flow Rate

Maximum 2.5 gpm (9.5 Lpm) single cartridge

Maximum 5.0 gpm (18.9 Lpm) dual cartridge

Pressure Requirements

10 - 125 psi (0.7 - 8.6 bar), non-shock

Maximum Water Temperature at Inlet

100°F (38°C)

Overall Dimension

25.5" H x 20.5" W x 7" D

(64.7 cm x 52.0 cm x 17.7 cm)

Inlet Connection

3/4" FNPT

Outlet Connection

3/4" FNPT

Operating Weight

35 lbs (15.8 kgs)

Shipping Weight

28 lbs (12.7 kgs)

Electrical Connection

None required

Alkalinity Range

2 to 12 grains per gallon

WARRANTY

Everpure warrants that the Everpure Kleensteam II Twin System will perform as described in the product literature for a period of 12 months from the date of purchase. Everpure does not warrant the performance of the Everpure Kleensteam II Twin System for applications not specified in the product literature. Everpure's warranty is limited to the replacement of the Everpure Kleensteam II Twin System or its components, at the discretion of Everpure, if found to be defective in materials or workmanship. Everpure's warranty is void if the Everpure Kleensteam II Twin System is used for applications not specified in the product literature, or if it is damaged, altered, or modified in any way. Everpure's warranty is void if the Everpure Kleensteam II Twin System is used in conjunction with any other water treatment system. Everpure's warranty is void if the Everpure Kleensteam II Twin System is used in conjunction with any other water treatment system. Everpure's warranty is void if the Everpure Kleensteam II Twin System is used in conjunction with any other water treatment system.

