

System Part Numbers:

CES-2850E-60 EV9983-31

CES-2850E-90 EV9983-32

CES-2850E-120 EV9983-33

SYSTEM DESCRIPTION

Water conditioning for commercial and light industrial applications configured as a single tank system with 1.5" Porting.

FEATURES • BENEFITS

- ◆ Hardness removal of 60,000 to 120,000 grains at flow rates up to 34 gallons per minute continuous
- ◆ Easily adjustable 5-cycle control
- ◆ Large capacity brine tank maximizes time between refills
- ◆ Fiberglass reinforced resin vessels with NSF-approved polyethylene liners guard against corrosion and optimize performance
- ◆ Electronic meter initiated regeneration minimizes salt, and water usage
- ◆ Utilizes NXT2 programmable controller

APPLICATIONS


- ◆ Cold water fed warewashing
- ◆ Laundry - linen & uniform
- ◆ Boiler scale control
- ◆ Water heater scale protection/reduction
- ◆ General housekeeping
- ◆

INSTALLATION TIPS

- ◆ Locate equipment on a smooth, level surface.
- ◆ Maintain an air-gap at the end of the drain line.
- ◆ Secure drain line directly over floor drain or stand pipe.
- ◆ When connecting to a water heater, install a check valve on the soft water piping to prevent hot water back-up.
- ◆ When sweating/installing copper piping, protect the control valve from excessive heat.
- ◆ Check local codes for additional equipment that may be required, such as backflow prevention devices (i.e. RPZ).

CES-2850E SERIES WATER CONDITIONERS

EV9983-31 · EV9983-32 · EV9983-33

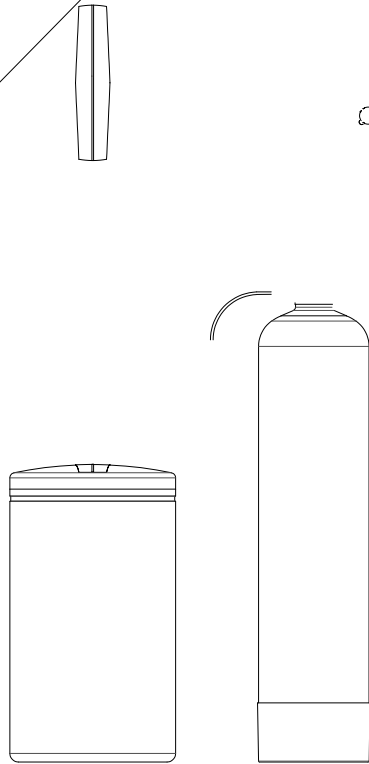

SPECIFICATIONS

System

Connections
 Inlet Connection: 1.5" FNPT
 Outlet Connection: 1.5" FNPT

Operating Pressure
 25- 125 psi (1.7 - 8.6 bar)
 non-shock

Performance

Water Temperature
 40 - 100°F (4.4 - 37.8°C)

Electrical Connection
 115VAC/60HZ/1Phase

Overall Dimensions

CES-2850E -60	63" H x 38" W x 19" D (160 cm x 97 cm x 48 cm)
CES-2850E -90	74" H x 46" W x 24" D (188 cm x 117 cm x 61 cm)
CES-2850E -120	74" H x 47" W x 24" D (188 cm x 119 cm x 61 cm)

Service Flow Rate

Model	Minimum Flow	@ 15psi (10bar) P	@ 25psi (17bar) P
CES-2850E -60	1 gpm (4 Lpm)	27 gpm (102 Lpm)	35 gpm (132 Lpm)
CES-2850E -90	1.2 gpm (5 Lpm)	32 gpm (121 Lpm)	42 gpm (159 Lpm)
CES-2850E -120	1.5 gpm (6 Lpm)	34 gpm (129 Lpm)	44 gpm (167 Lpm)

Capacity

Model	Rated Capacity	Salt Storage Capacity
CES-2850E -60	50,000 grains @ 18 lbs (8kg) salt	425 lbs (193 kgs)
CES-2850E -90	75,000 grains @ 27 lbs (12 kg) salt	750 lbs (340 kgs)
CES-2850E -120	100,000 grains @ 36 lbs (16 kg) salt	750 lbs (340 kgs)

Weight

Model	Operating Weight	Shipping Weight
CES-2850E -60	860 lbs (390 kg)	200 lbs (91 kg)
CES-2850E -90	1,420 lbs (644 kg)	290 lbs (132 kg)
CES-2850E -120	1,600 lbs (726 kg)	360 lbs (163 kg)

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>

