



APPLICATIONS

Whole House

FEATURES • BENEFITS

Professional grade PFOA/PFOS reduction system for the home

System is certified by IAPMO R&T to reduce up to 98% of PFOA/PFOS, commonly known as “forever chemicals”

Maximum filtration with minimal pressure drop

Choose a mounting location suitable to support the full weight of the system when operating.

Make sure to properly lubricate O-ring prior to use.

Do not exceed service flow rate.

Inspect O-ring during each cartridge change. Lubricate and/or replace if necessary.


Service Flow Rate: Maximum 5 gpm

20" filter housing

20" filter cartridge

Wrench

FLOPLUS PROTECT 20BB PFOA/PFOS FILTRATION SYSTEM

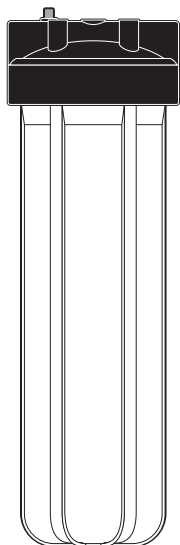

SPECIFICATIONS

System (Model/Part No.)
FLOPLUS PROTECT 20BB
PFOA/PFOS FILTRATION SYSTEM
FloPlus Protect 20BB/150736 (1/Case)

Housing Size
20" Heavy duty

Inlet Size
1 1/2" FPT

Housing Material
Polypropylene

System Dimensions
23.22" H x 7.45" W
(590 mm x 189 mm)

Cartridge Type
FibreDyne Carbon Block

Contaminant Reduction
PFOA/PFOS: Certified by IAPMO R&T
against NSF/ANSI 53

Micron Rating
0.5

Approximate Filter Life*
4 - 5 months

Capacity
15,000 gallons (56,781 Liters)

Flow Rate
5 gpm (18.9 Lpm)

Certification
NSF/ANSI Std. 53

Feed Pressure Range
30 - 90 psi (2.06 - 6.20 bar)

Temperature Range
40° - 100°F (4.4 - 37.8°C)

Replacement Cartridge
(Model/Part No.)
FloPlus Protect 20BB / 655223-43
(6/Case)

* Filter life dependent on gallon usage and overall incoming water quality.