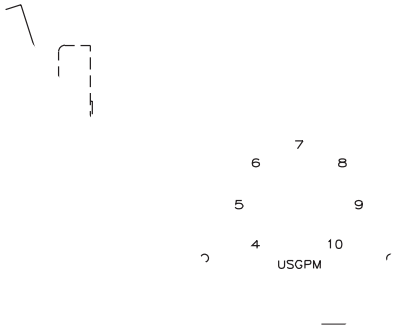

ES:
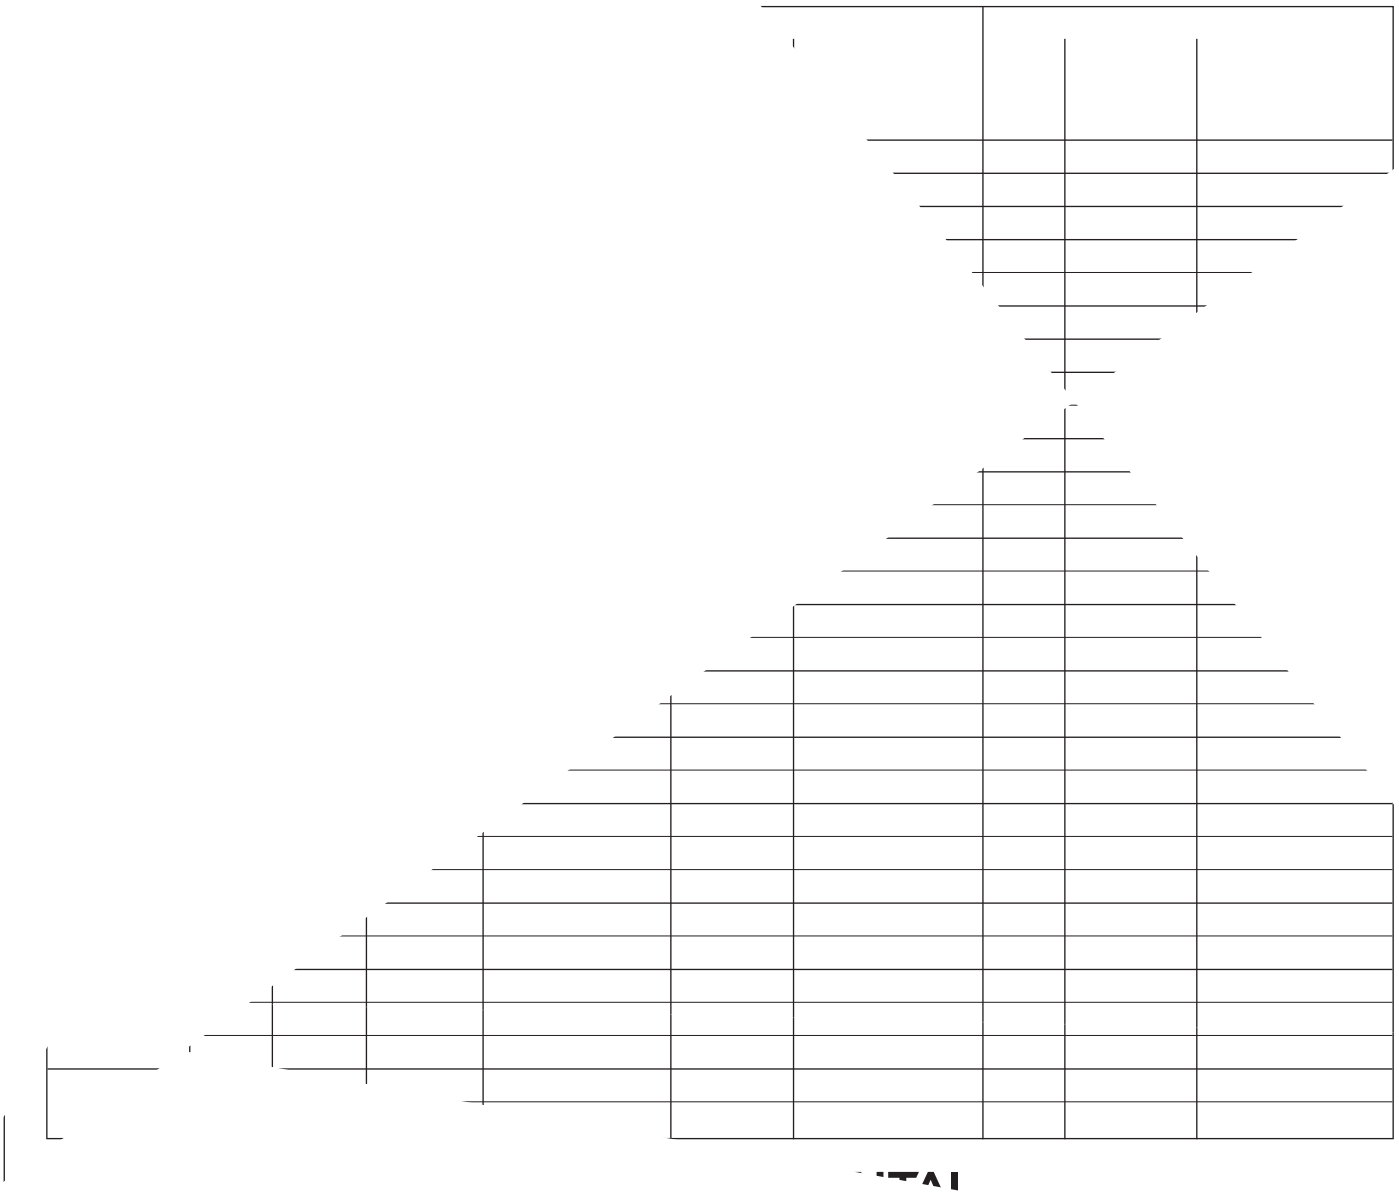
1. **Accuracy is approximately ± 2.5%.**
2. **Flow meter is Preso Type "CV" fabricated steel rated for 250 PSI.**
3. **Proper operation requires that minimum distances of straight pipe runs be maintained both upstream and downstream from flowmeter. Refer to manufacturer's instructions before attempting installation.**
4. **Meter range is 50% to 200% of nominal rated flow. Dial is direct reading in G.P.M. for the specified range.**