

# HYDROMATIC®

## SP40



### SUBMERSIBLE SEWAGE EJECTOR

#### PERFORMANCE DATA

Wholesale Products Page: 6140-1

Dated: January 2001

RPM: 1750 Discharge: 2" Solids: 1 1/4"

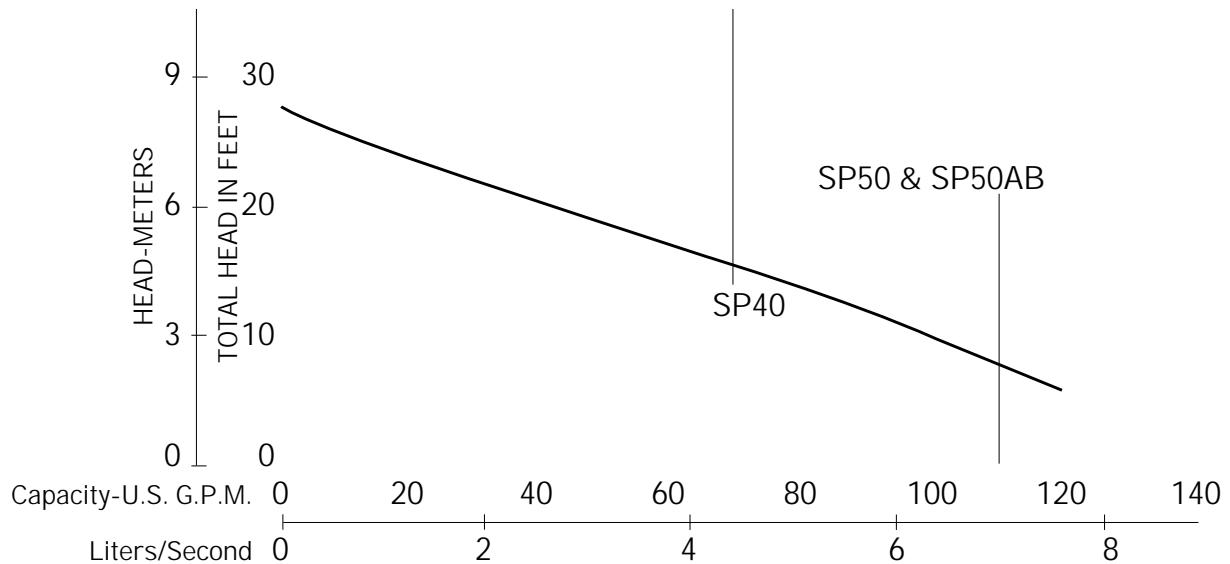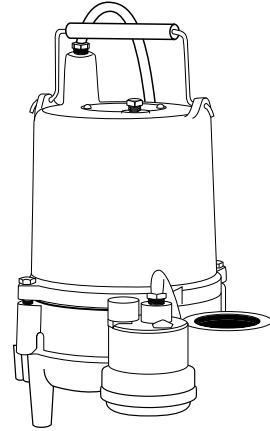

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

Conditions of Service:

GPM: \_\_\_\_\_ TDH: \_\_\_\_\_


# HYDROMATIC®

## DIMENSIONAL DATA


### SP40 SUBMERSIBLE SEWAGE EJECTOR

Wholesale Products Page: 6140-2

Dated: January 2001

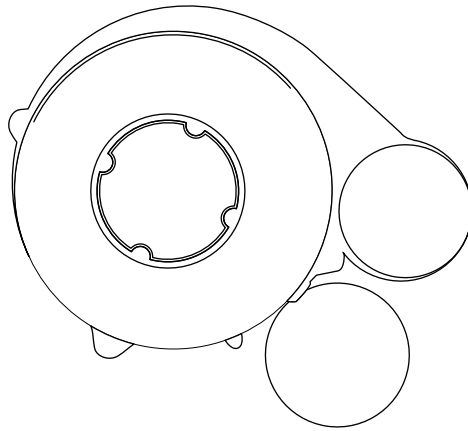

All dimensions in inches. Metric for international use. Component dimensions may vary  $\pm 1/8$  inch. Dimensional data not for construction purpose unless certified. Dimensions and weights are approximate. On/Off level adjustable. We reserve the right to make revisions to our product (s) and the product (s) specifications without notice.



f





USA  
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.HYDROMATIC.COM  
PH: 888-957-8677 ORDERS FAX: 800-426-9446

CANADA  
269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5  
PH: 519-896-2163 ORDERS FAX: 519-896-6337