

# HYDROMATIC®

## PERFORMANCE DATA



### SHEF30

Wholesale Products Page: 6350-1


Dated: January 2001

### SUBMERSIBLE HIGH HEAD EFFLUENT

RPM: 1550 Discharge: 1 1/2" Solids: 3/4"

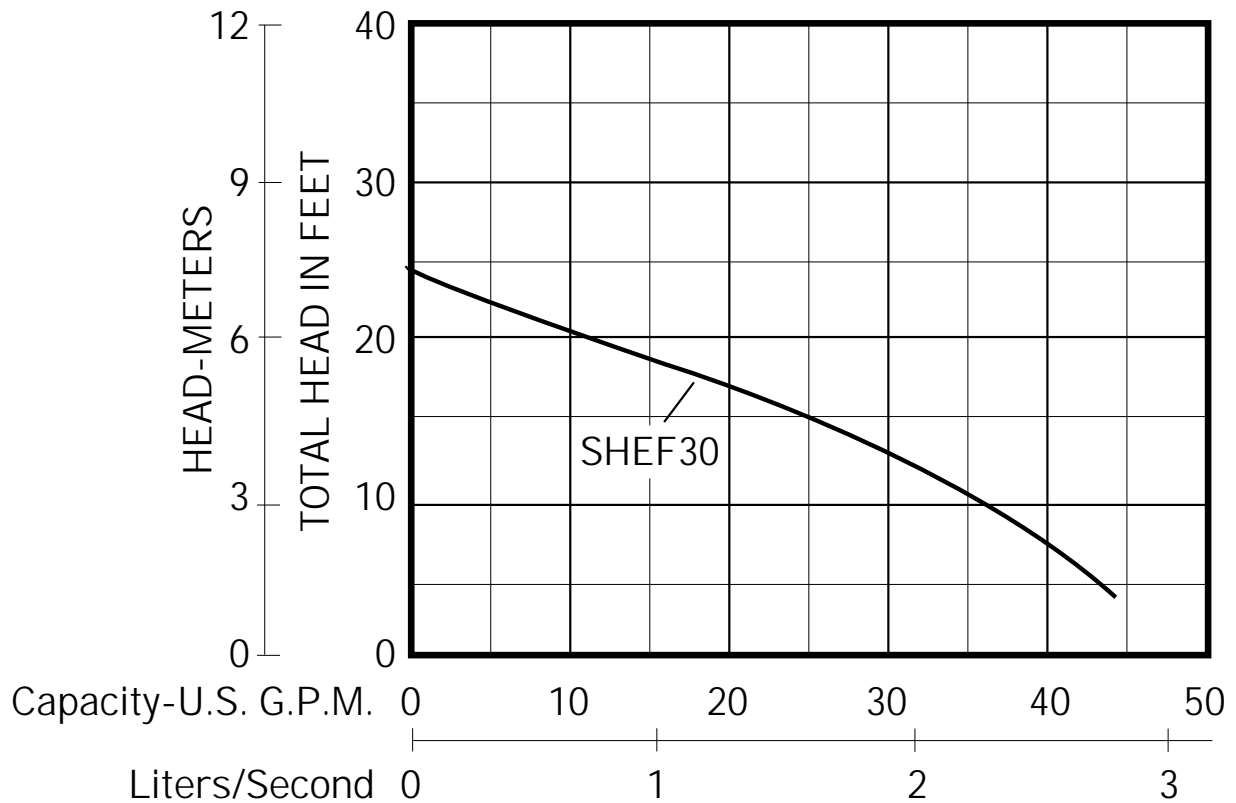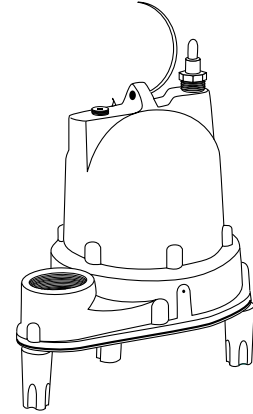

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

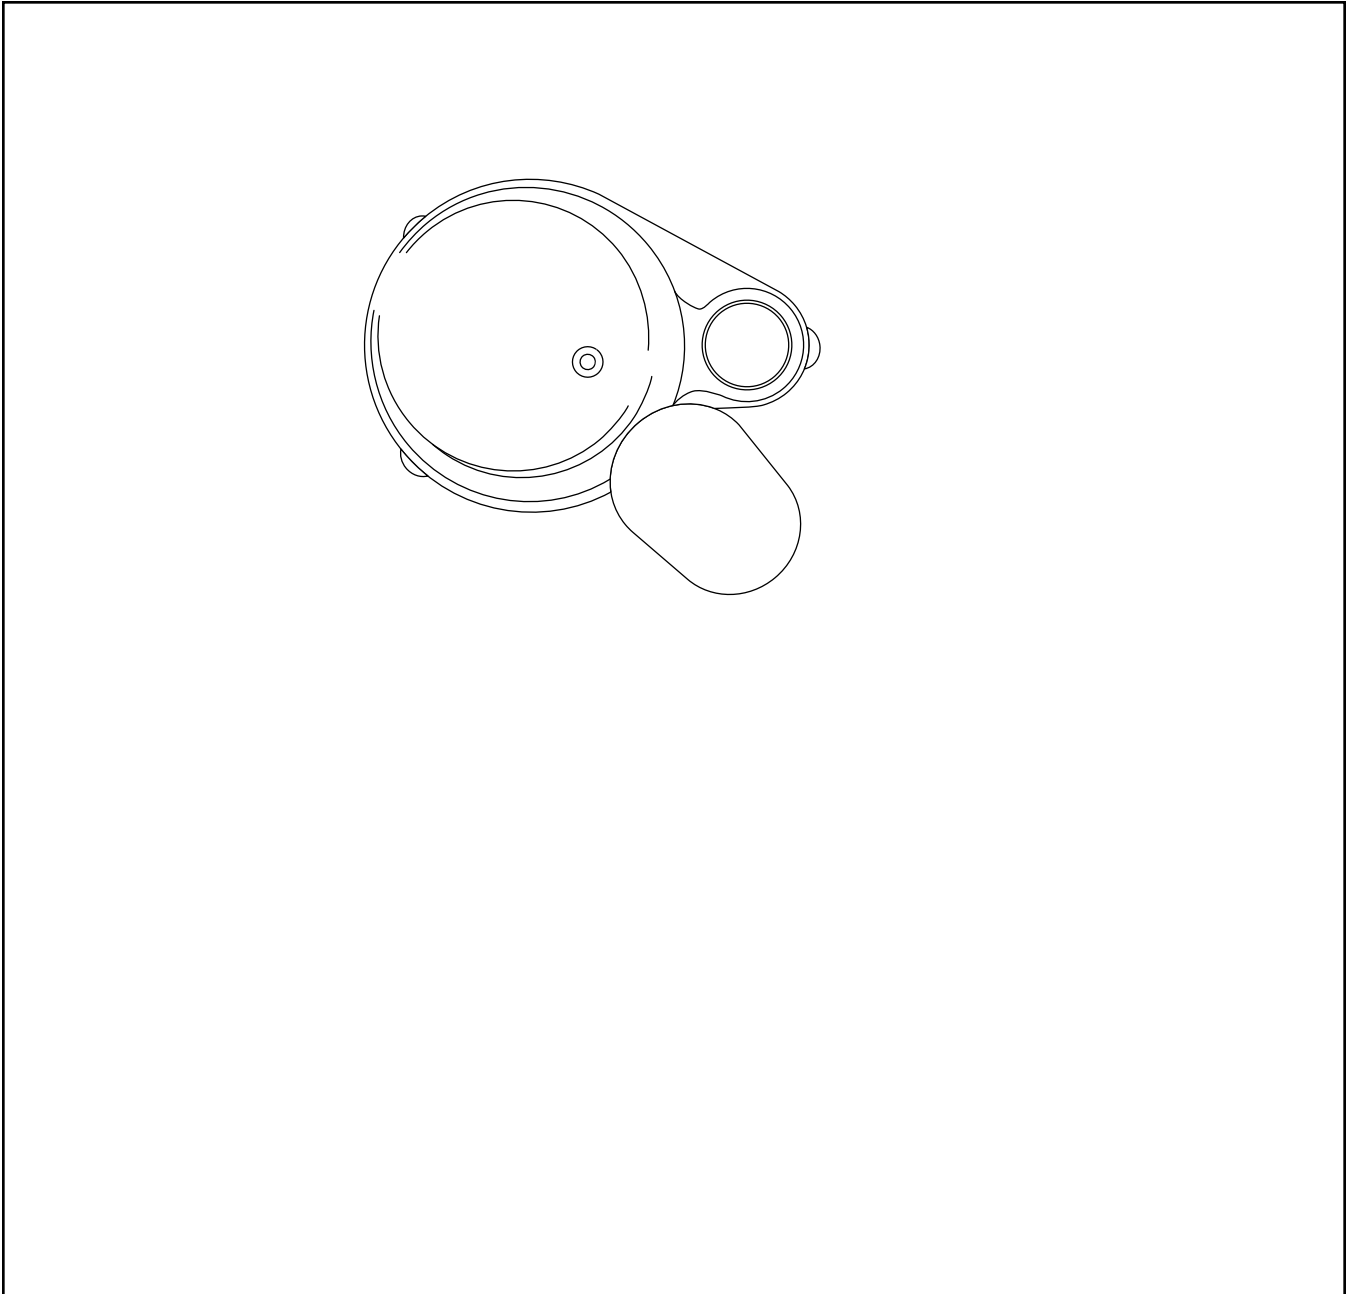

All dimensions in inches. Metric for international use. Component dimensions may vary  $\pm 1/8$  inch. Dimensional data not for construction purpose unless certified. Dimensions and weights are approximate. On/Off level adjustable. We reserve the right to make revisions to our product (s) and the product (s) specifications without notice.

