

HYDROMATIC®

PERFORMANCE DATA

HUP


1/6 HP SUBMERSIBLE UTILITY PUMP

Wholesale Products Page: 6660-1

Dated: January 2001

RPM: 1550 Discharge: 1" Solids: "

Handwritten scribbles

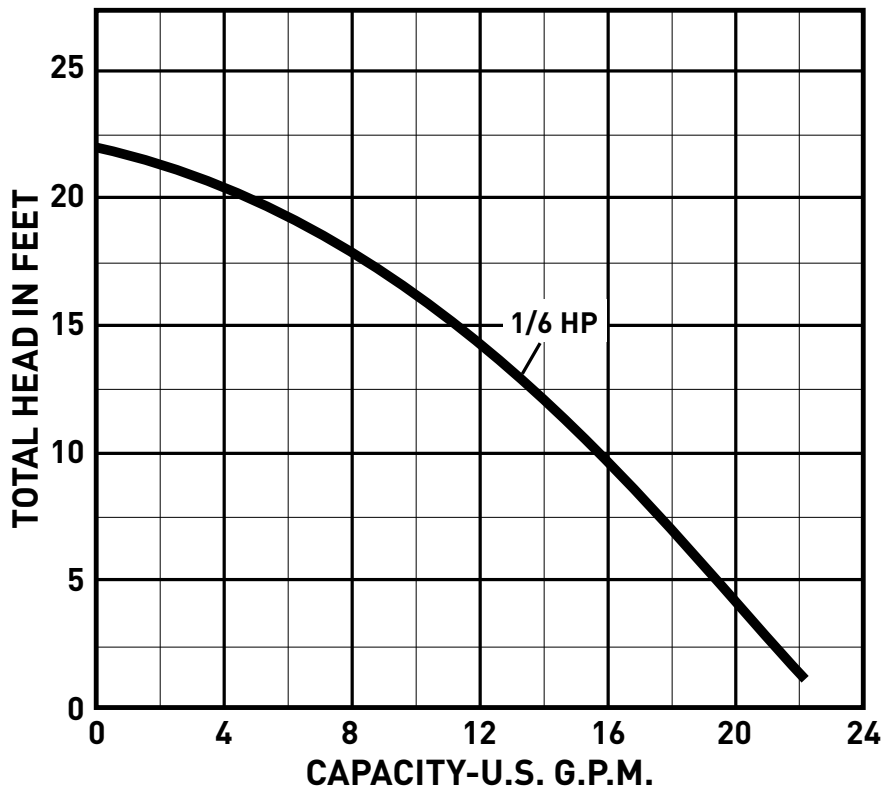

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.



Conditions of Service:

GPM: _____ TDH: _____

1.01 **GENERAL**

Contractor shall furnish all labor, materials, equipment and incidentals required to provide _____ (Qty.) submersible centrifugal non clog sewage pump(s) as specified herein. The pump model covered in this specification is the HUP. The pump furnished for this application shall be MODEL _____ as

USA
293 WRIGHT STREET, DEL

CANADA