

FAIR



MYERS® MODELS 12VL & 12VLX


Solids Handling Pumps

| Product Capabilities | | |
|------------------------|---|-----------|
| Capacities To | 7750 gpm | 29331 lpm |
| Heads To | 72 ft. | 21.9 m |
| Solids Handling (dia.) | 5-1/4 in. | 133.3 mm |
| Liquids Handling | raw, unscreened sewage, drain water, effluent | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| Construction Materials | |
|---|-----------------------------------|
| Motor Housing, Seal Housing, Cord Cap and Volute Case | cast iron, Class 30, ASTM A48 |
| Enclosed 2-Vane Impeller | ductile iron, Class 65, ASTM A536 |
| Power Cord | SOOW |
| Control Cord | W |
| Mechanical Seals: | |
| Standard | double tandem carbon and ceramic |
| Optional | lower tungsten carbide |
| Pump, Motor Shaft | 416 SST |
| Fasteners | 300 Series SST |
| Case Wear Ring | bronze |

Dimensions

[Dimensions in mm]

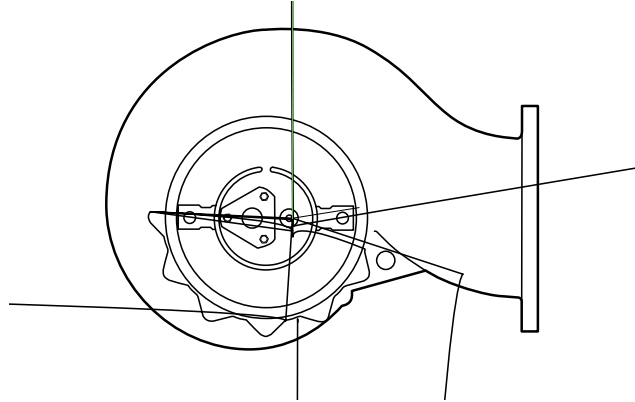



1101 MYERS PARKWAY
ASHLAND, OHIO 44805
PH: 855-274-8948
WWW.FEMYERS.COM

490 PINEBUSH ROAD, UNIT 4
CAMBRIDGE, ONTARIO, CANADA N1T 0A5
PH: 800-387-4386 ORDERS FAX: 888-606-5484
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3342 08/07/17 © 2017 Pentair Ltd. All Rights Reserved.