


MYERS®
T G30H 75H AND T G 30H 75H
STANDAR

MYERS® WG30H-75H AND WGX30H-75H


TECHNICAL INFORMATION

Product Capabilities		
Capacity (GPM)	98	371
Head (ft)	170	52.0
Head (m)		
Temperature (F)	140	60
Temperature (C)	311	155
Motor (HP)	3450 PM, 60 H 3.5 HP, 230 V, 1 3.7 HP, 200, 230, 440, 545 V, 3	
Power (kW)	C.A. FM, C.A., 1.6 (WG 30H-75H)	
Amperage (A)	6.9	
Grindability	.9 1.1	
Weight (lb)	28 35	
Weight (kg)	2.7	63.5
Weight (lb) (D.W.)	30	91.4
Weight (kg) (D.W.)	40	121.9
Notes: C.A. = Cast Aluminum		
Construction Materials		
Motor Housing (M.H.)	Cast Aluminum, 30, A.M.A.48	
Impeller (I)	304	
Pump Case (P.C.)	304	
Collector (C.C.)	304	
Motor (M)	304 & 316	
Power (P.M.)	416	
Frame (F)	300	
Weight (W)	440 58-60	

PERFORMANCE CURVE

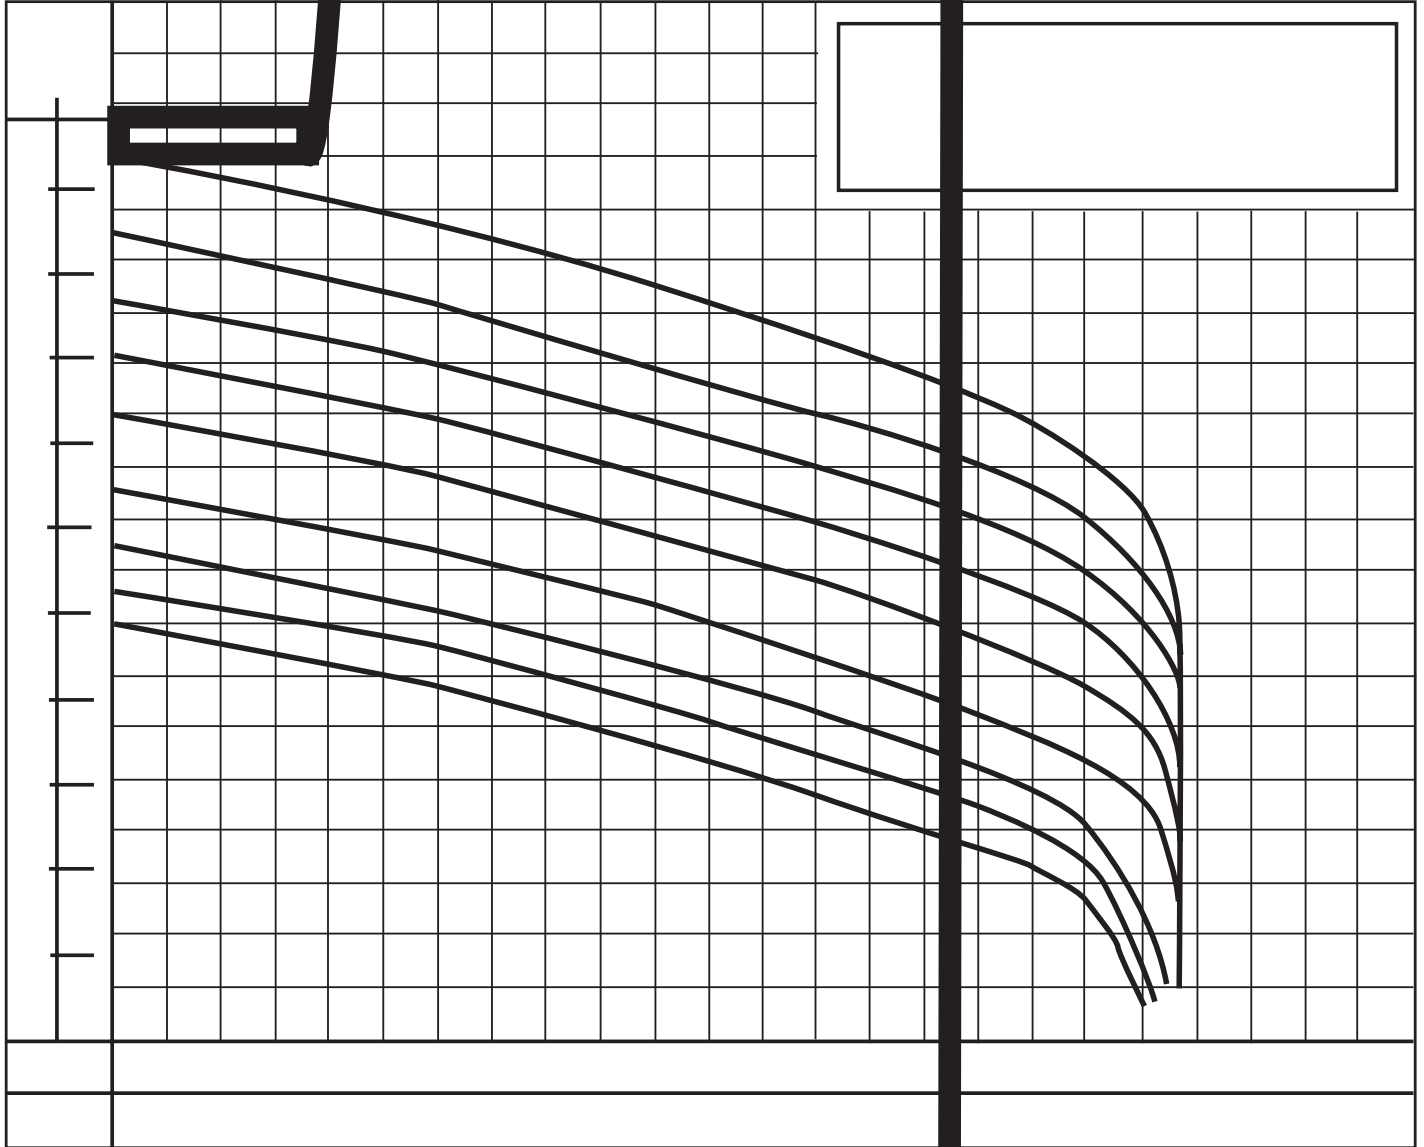

AB AN AGE B DE IGN

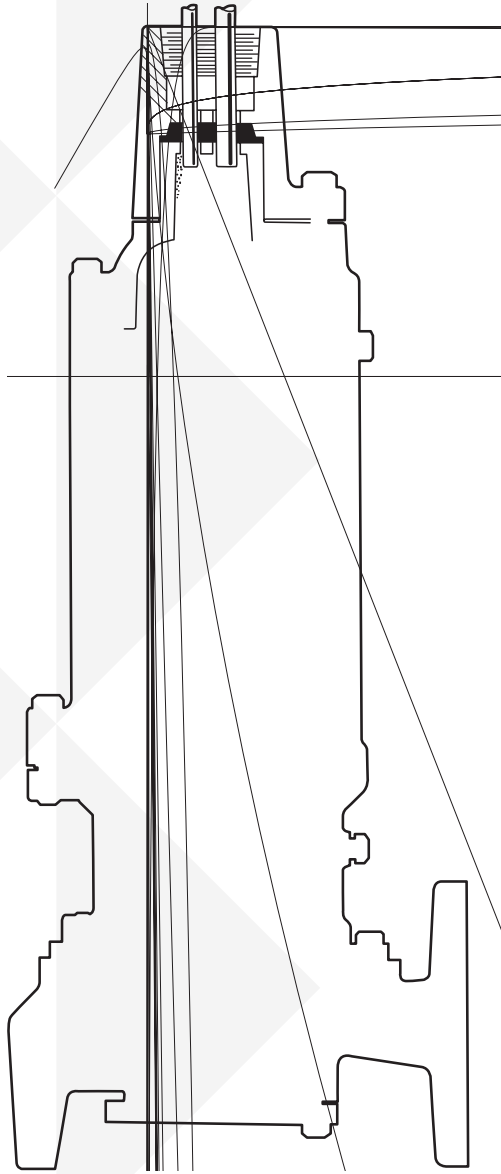

740 EAST 9TH STREET,
ASHLAND, OHIO 44805
WWW.FEMYERS.COM

269 TRILLIUM DRIVE, KITCHENER,
ONTARIO, CANADA N2G 4W5
WWW.FEMYERS.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K3426 01/30/13 © 2013 Pentair Ltd. All Rights Reserved.