

MYERS® M118A

The Myers M118A pre-packaged systems is a convenient and reliable design for many applications. With the pump, basin, schedule 40 PVC discharge pipe and check valve being assembled at the factory, you can quickly and easily install this packaged system. The high performance 1/3 HP sump pump will quickly remove water from the 10 gallon polyethylene basin leaving you worry free.




APPLICATIONS

Above-floor sump pump system. Ideal for wet bars, air conditioner/humidifier condensate and laundry trays

SPECIFICATIONS

Capacity	53 GPM (200 LPM)
Discharge Pipe Length	25' (7.6 m)
Discharge Pipe Size	1/4" (6.4 mm)
Discharge Pipe Material	Drain water
Operating Temperature	up to 140 F (60 C)
Discharge Pipe Diameter	1-1/2" (38.1 mm)
Motor Speed / Voltage / Frequency	3000 RPM, 115V, 1Ø, 60 Hz
Flow Rate @ 10' Head	32 GPM
Flow Rate @ 20' Head	22 GPM
Flow Rate @ 30' Head	15 GPM
Flow Rate @ 40' Head	10 GPM
Flow Rate @ 50' Head	7 GPM
Flow Rate @ 60' Head	5 GPM

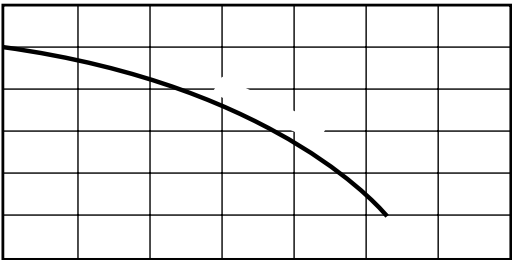

FEATURES

- Convenient Packaging**
 Allows you to add a drain without breaking concrete
- Durable and Reliable**
 Durable zinc & cast iron pump construction along with the thick polyethylene basin creates a combination of materials you can rely on
- High Performance & Efficiency**
 Smooth flow pump technology provides high output. The PSC motor reduces energy consumption and provides a longer life

ORDERING INFORMATION

Capacity	3.9	Discharge Pipe Diameter	Vertical Automatic*	Head	32		
1/60		1-1/2"		10'			

*Indicates a piggy-back float switch

DIMENSIONS OF PUMP

DIMENSIONS OF BASIN