MYERS[®] MWS9 Series

Cast Iron Submersible Sewage Pumps


SPECIFICATIONS





FEATURES

- Impeller Non-clog vortex style, pump out vanes for seal protection.
- Dual Shaft Seals -Primary mechanical seal with a secondary selflubricating lip seal.
- Bearing and Mechanical Seal – Permanently lubricated for long life.
- · Serviceability Heavyduty lift-out ring, field serviceable.
- Overload Protection -Built-in thermal overload with automatic reset on single phase
- Cord Design Prevents oil loss from and moisture protection for motor.
- Controls Standard controls available for automatic operation.

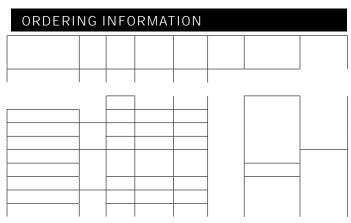

In order to provide the best products possible, specifications are subject to change.

OUTLINE DIMENSIONS



USA

293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM PH: 888-987-8677 ORDERS FAX: 800-426-9446 SEWAGE PUMPSMWS9 Series: 2'8NPT DischargeMWS39 Series: 3'8NPT Discharge

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.