


# W

## PQP SERIES

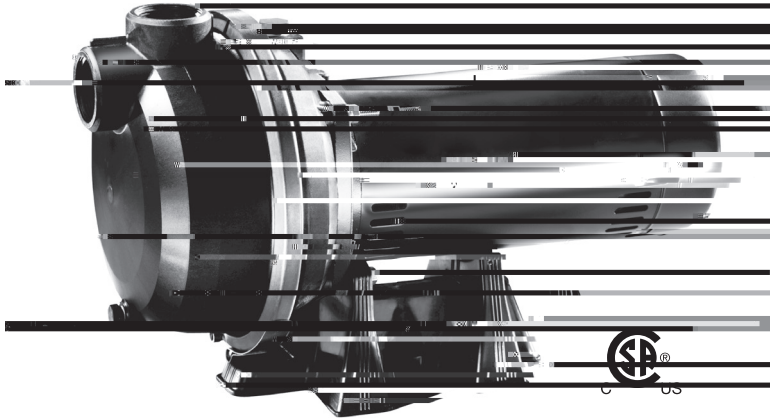

Quick priming PQP series pumps feature lightweight construction in a self-priming design. These models offer a stronger pump body with reinforcement ribs and also a new 2" suction that is designed for the professional pump contractor.

### APPLICATIONS

Turf sprinkling and water transfer for residential and light commercial.

### SPECIFICATIONS

**Pump Body:** Fiberglass-reinforced engineered composite .

**Base:** High-impact composite.

**Seal:** 1.5" ID P. 517 m 009.0 30 114 11.5 6 15 6 1 5 10 8 1 6 10 9 1 11.3

**engineered composite.**

**Impeller:** Polycarbonate.

**Diffuser:** Polycarbonate.

**Shaft:** Stainless steel.

**Clamp:** Stainless steel.

### FEATURES

1, 1-1/2, 2 and 2-1/2 HP.

**Single Phase:** 115/230V dual voltage, 60 Hz; ODP.

**Pump Body:** Fiberglass reinforced, polypropylene pump body and seal plate that is lightweight and corrosion resistant while being exceptionally strong.

**Drain Port:** Provided for easy winterization.

**Pump Base:** Corrosion resistant composite.

**Easy Service:** Easy serviceable back with pullout design.

**Motor:** 2 compartment, square flange motor with thermal overload protection.

**Rapid Priming:** Once pump body is filled with water.

### ORDERING INFORMATION

CATALOG NUMBER	HP	PIPE SIZES		MOTOR VOLTAGE	APPROX. WT. LBS.
		SUCTION	DISCHARGE		
PQP10	1	1-1/2"	1-1/2"	115/230	38
PQP15	1-1/2	1-1/2"	1-1/2"	115/230	41
PQP20	2	2"	2"	230	52
PQP25	2-1/2	2"	2"	230	54



OUTLINE DIMENSIONS

