

STA-RITE® DS2 Series

- n n



Fast-priming DS2 Series pumps in 1 through 2-1/2 HP models, with a low-friction Lexan® or Noryl® impeller. These high head pumps feature leakproof mechanical seals, easy service design, heavy-duty motors and rugged construction. Self-priming after initial filling with water.

APPLICATIONS

Lawn sprinkling:
Contractors:
Agriculture:
Industrial:

SPECIFICATIONS

Body and Base: - n n
Impeller: n
Diffuser: n
Shaft: n

FEATURES

Rugged Construction: - n
Drain Port: n n
High Head Models:
Easy Serviceability: n
Heavy-Duty Motors: n

Catalog Number	HP	Pump/Motor Unit		Motor Voltage	Phase	Approx. Wt. Lbs.
		Suction	Discharge			
2	1	2"	1-1/2"	11 /2 0	1	
2	1	2"	1-1/2"	20 /2 0/ 0		
2	1-1/2	2"	1-1/2"	11 /2 0	1	
2	1-1/2	2"	1-1/2"	20 /2 0/ 0		
2	2	2"	2"	2 0	1	1
2	2					


STA-RITE® DS2 Series

- n n

STA-RITE® DS2 Series

- n n

OUTLINE DIMENSIONS

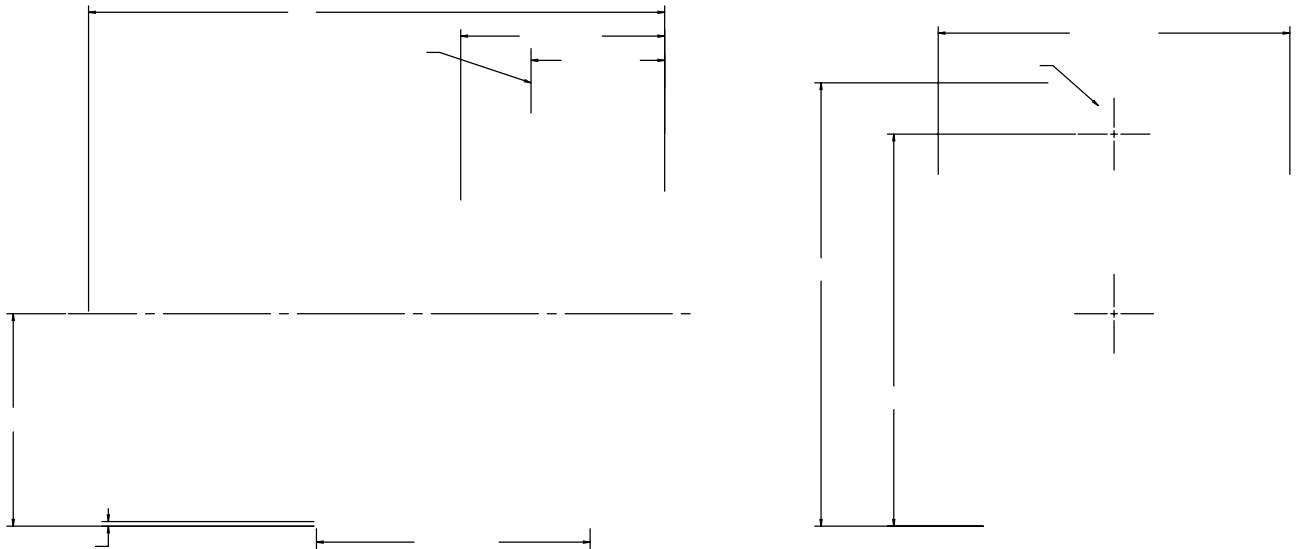

Cat. No	HP	A*
2 ⊥	2-1/2	1 .
2 ⊥	2	1 .
2 ⊥	1-1/2	1 .
2 ⊥	1	1 .

* n n (A) n n - n n n (n n) n n .

