


J/JB Series

General Purpose Centrifugal Pumps




UL778/CSA108

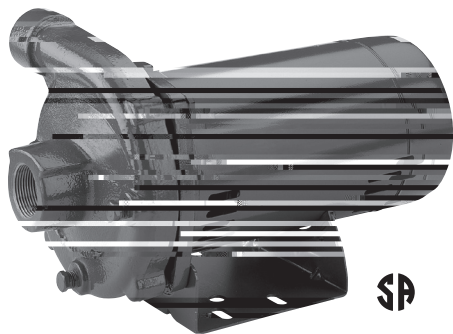


J/JB Series

General Purpose Centrifugal Pumps

PUMP PERFORMANCE: HIGH HEAD, SILICON BRONZE IMPELLER

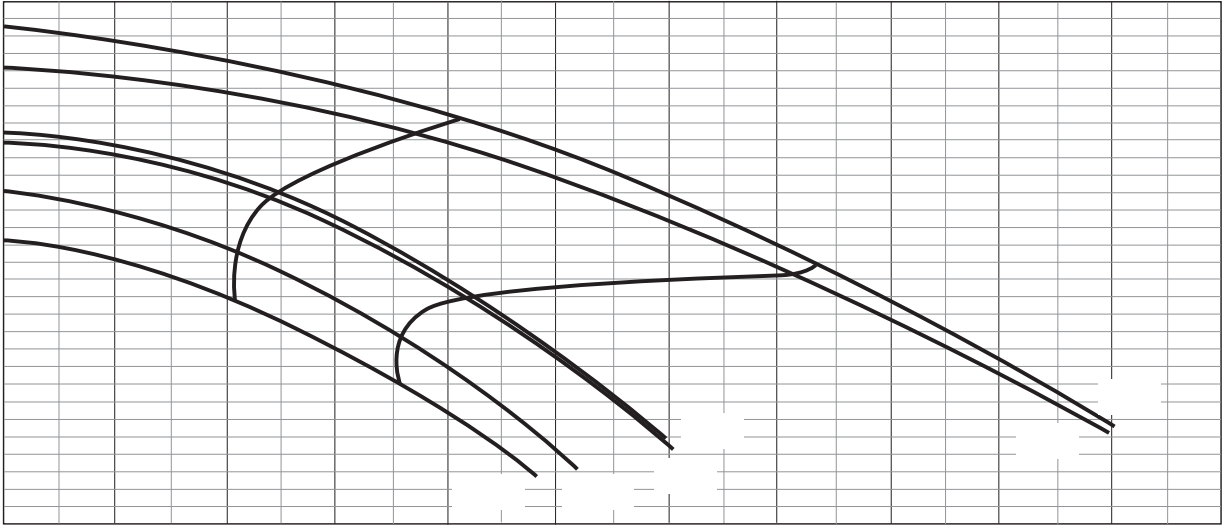

PUMP PERFORMANCE: HIGH HEAD, NORYL® IMPELLER

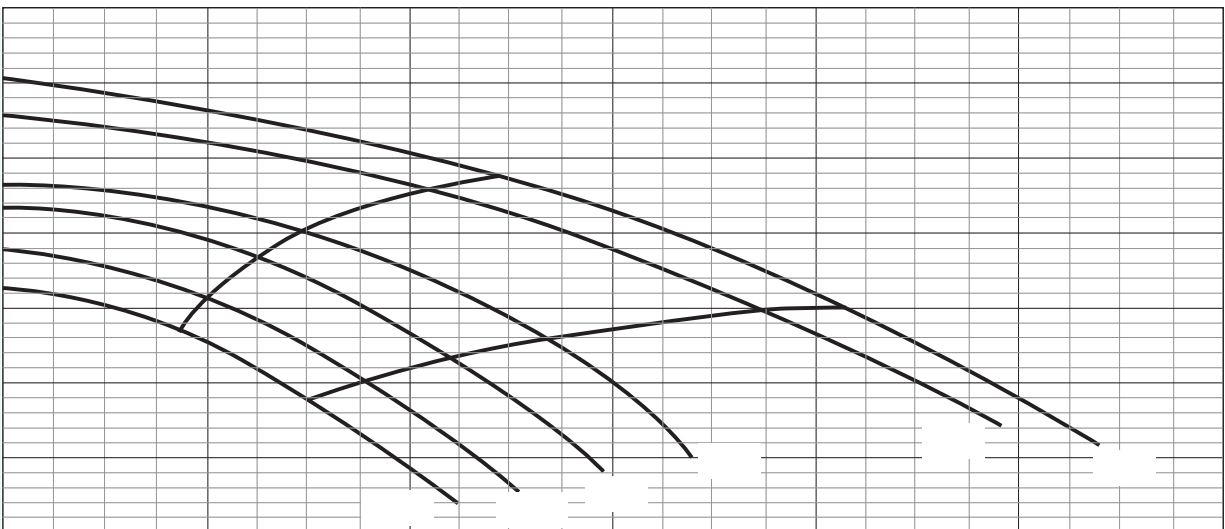

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source[®] tank require a 100 PSI relief valve. Pumps with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.



J/ JB Series

General Purpose Centrifugal Pumps

Dimensions (in inches) are for
estimating purposes only.

