

**FEATURES**

**Signal Seal Staging System** :  
Our proven Signal Seal staging system incorporates a harder-than-sand ceramic wear surface that when incorporated with our floating impeller design, greatly reduces problems with abrasives, sand lock-up and running dry.

**Body** : Corrosion-resistant fiberglass-reinforced thermoplastic for durability in aggressive water. Large octagon wrench area for ease of installation.

**Body - Bearing** : Exclusive self-lubricating Nylatron bearing resists wear from sand.

**Impeller** : Corrosion-resistant fiberglass-reinforced thermoplastic for durability in aggressive water.

**Motor** :







# A E Signature 2000<sup>®</sup>

Composite, 5 and 7 GPM TrimLine™

**E F A CE: 5**

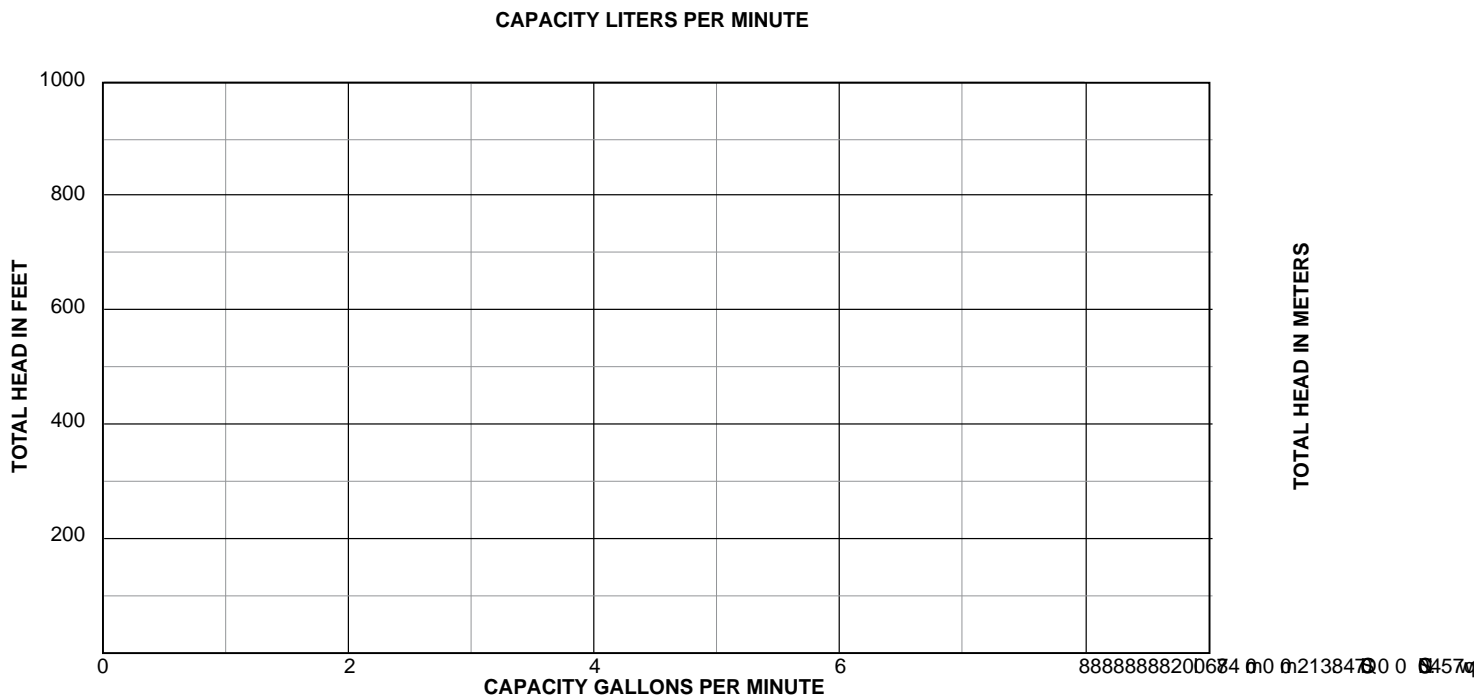

**E F A CE: 7**

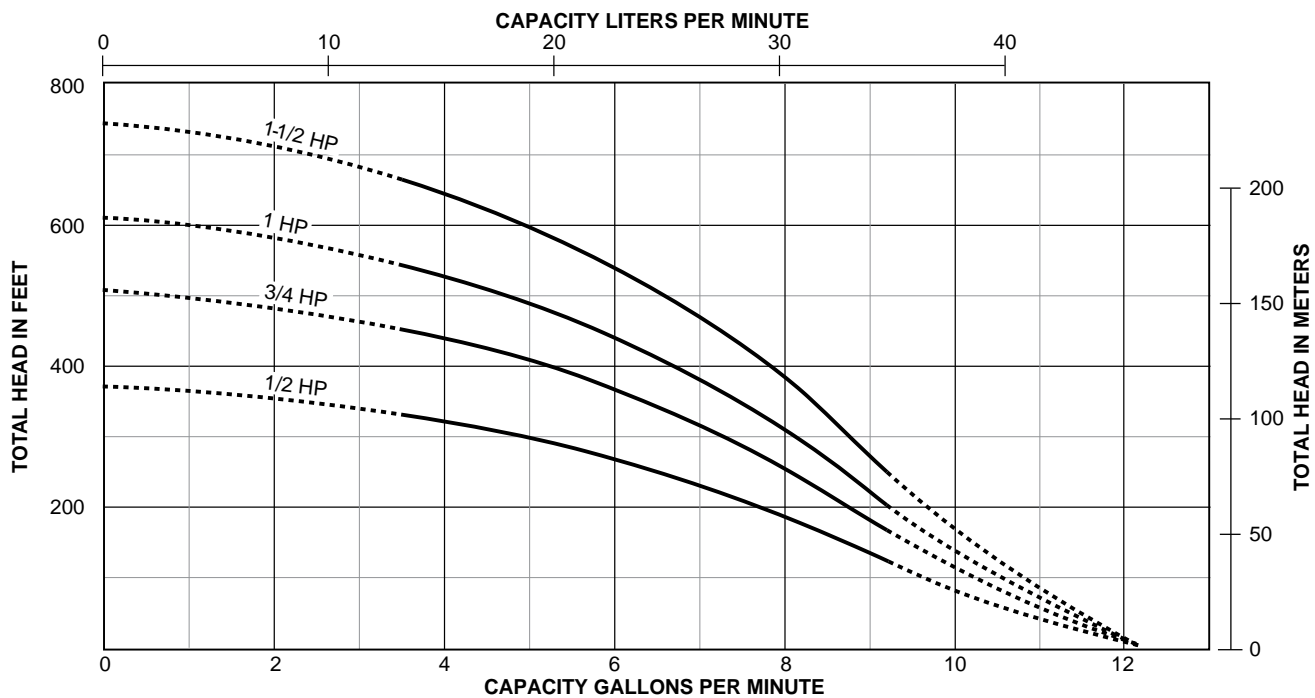

Tested and rated in accordance with Water Systems Council Standards.  
 NOTE: Pumps installed with a Pro-Source<sup>®</sup> tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve.  
 Relief valve must be capable of relieving entire flow of pump at relief pressure.

**A E** Signature 2000®  
Composite, 5 and 7 GPM TrimLine™

---

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty is void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

CAUTION: DO NOT use pump at flow rates indicated by the symbol '—'. To do so can cause premature failure of unit. Pump warranty is void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve.

**A E** Signature 2000®  
Composite, 5 and 7 GPM TrimLine™



US: 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.STA-RITE.COM PH: 888-782-7483 ORDERS FAX: 800-426-9446  
CANADA: 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484  
Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.