




STA-



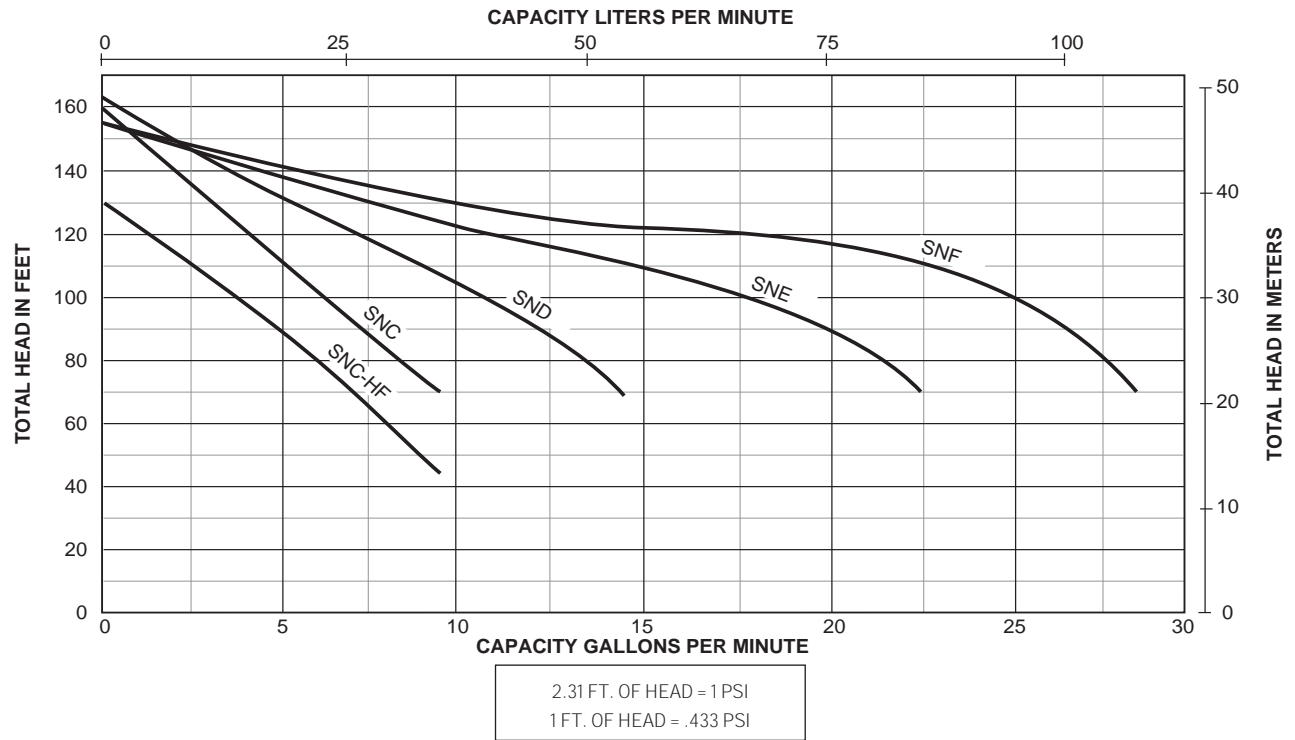

Model	Discharge	Depth (ft)	Capacity (GPM)					Total Head (ft)
			10	15	20	25	30	
SNC-HF25L	1/2	20-40	13.7	12.3	10.6	8.8	6.3	56
			11.8	10.6	9.3	8.2	6.2	
			7.2	6.3	5.2	4.0	2.4	
SNC	1/2	30-50	9.7	8.3	7.4	5.9	4.3	70
			7.9	7.2	6.4	5.6	4.1	
			4.5	3.8	3.1	2.7	1.8	
SND	3/4	30-50	15.0	13.0	11.6	8.7	6.9	70
			12.5	11.4	10.1	8.2	6.8	
			8.0	6.8	6.1	4.8	3.5	
SNE	1	30-50	21.4	19.1	16.5	13.3	9.5	67
			20.8	18.7	15.8	13.2	9.3	
			13.5	11.6	10.1	7.4	2.4	
SNF	1-1/2	30-50	28.5	25.0	21.4	17.4	12.6	67
			28.3	24.4	21.0	17.2	12.3	
			21.5	18.3	10.9	3.1	1.6	

Pump will operate at all depths shown, with pressure switch set at 30-50 PSI.

Tested and rated in accordance with Water Systems Council Standards.

NOTE: Pumps installed with a Pro-Source® tank require a 100 PSI relief valve.  
Pumps installed with a conventional tank require a 75 PSI relief valve.





293 Wright St  
Delavan, WI 53115  
Ph: 888-782-7483  
Fx: 800.426.9446

490 Pinebush Rd., Unit 4  
Cambridge, Ontario N1T 0A5, Canada  
Ph: 800-363-7867  
Fx: 888-606-5484

[pentair.com](https://www.pentair.com)

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.  
Lexan is a registered trademark of SABIC Global Technologies B.V..  
Noryl is a registered trademark of SHPP GLOBAL TECHNOLOGIES B.V..